

RUBBER EXPANSION JOINTS SINGLE SPHERE FLANGED END

GENERAL CHARACTERISTICS:

Range from ND32 up to ND600.

Designed to absorb dilatation movements, vibrations in fluid conduction pipelines from any direction.

Double wave construction with low load loss.

Made with a special molding technique using synthetic fiber of high resistance, they can support a braking pressure of more than 60 bar, even if the usual working pressure is not above 16 bar.

APPLICATION:

Heating, air conditioning, cooling overheated water, water systems, pump stations, connection of compressors, industrial & ship installations.

STANDARDS:

Mounting with flanges: EN 1092-1 PN10 / PN16/ANSI150#

Flange according to DIN2632

Side flanges according to: ISO 7005-1.

Pressure Test: EN 12266-1, class A.

Body: 24 bars.

Products excluded from directive 2014/68/EU Equipment under pressure (Article 4 & 3).

WORKING CONDITIONS:


Maximum Working Pressure: 16 bar (*)

Explosion Pressure: 50 bar.

Working Temperature: - 10 °C - + 100 °C.

See correction chart according to temperature.

Vacuum KPa(mmHg) 65(490).

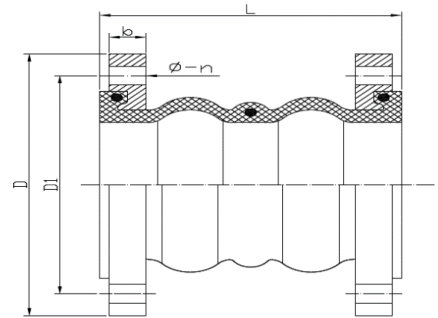


DOUBLE WAVE DIMENSIONS

DN	L	Weight	PN 10				PN 16				DISPLACEMENT			
			D	D1	b	φ-n	D	D1	b	φ-n	Extens.	Compr.	Transv.	Angle
40	175	3.1	150	110	14	18-4	150	110	14	18-4	10	20	20	15°
50	175	4.3	165	125	15	18-4	165	125	15	18-4	10	20	20	15°
65	175	5.4	185	145	15	18-4	185	145	15	18-4	10	20	20	15°
80	175	6.5	200	160	17	18-8	200	160	17	18-8	10	20	20	15°
100	225	8.1	220	180	17	18-8	220	180	17	18-8	15	30	25	15°
125	225	10.8	250	210	19	18-8	250	210	19	18-8	15	30	25	15°
150	225	13.4	285	240	19	22-8	285	240	19	22-8	15	30	25	15°
200	325	21.1	340	295	21	22-8	340	295	21	22-12	20	40	30	15°
250	325	27.3	395	350	23	22-12	405	355	23	26-12	20	40	30	15°
300	325	31.0	445	400	22	22-12	460	410	24	26-12	20	40	30	15°

RUBBER EXPANSION JOINTS SINGLE SPHERE FLANGED END

NO.	PART	MATERIAL
1	BODY	EPDM/NBR
2	KEY FRAME	CORD FABRIC
3	PRESSURIZED RING	STEEL WIRE STRAND
4	FLANGED	STEEL Q235




ELASTOMER

MATERIALS CODE	BODY	HIGHEST TEMPERATURE
BB	Butile	90°
EE	E.P.D.M.	105°
NY	Hypalon	100°
NN	Neoprene	90°
NBR	NBR	90°

TEMPERATURE / PRESSURE RATE FOR LONG LIFE (EPDM)

Ø NOMINAL	HIGHEST TEMPERATURE AND WORKING PRESSURE					
	80°C	85°C	90°C	95°C	100°C	105°C
32 a 300	15 BAR	12 BAR	10 BAR	7 BAR	4 BAR	2 BAR
350 a 600	10 BAR	8 BAR	7 BAR	5 BAR	2 BAR	1 BAR






Body of synthetic rubber and reinforcing fiber.

Reinforcing ring make of steel for spring.


Cast C. Steel plated flanges.

WORKING PRESSURE/ TEMPERATURE TABLE

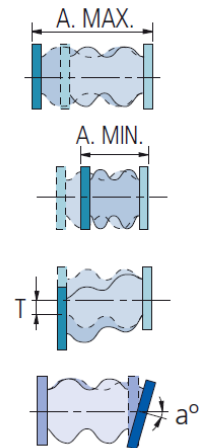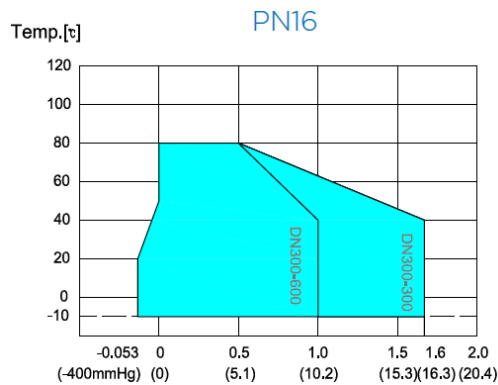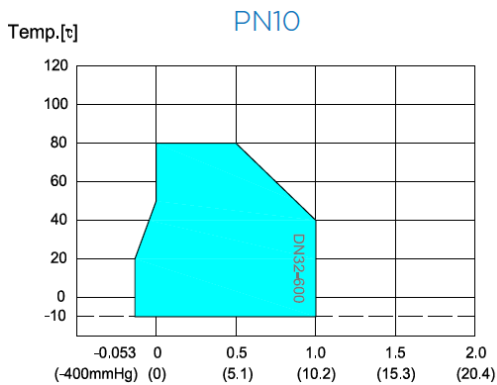


RUBBER EXPANSION JOINTS SINGLE SPHERE FLANGED END

ASSEMBLY POSITION



TIE RODS INCLUDE NUTS AND WASHES.

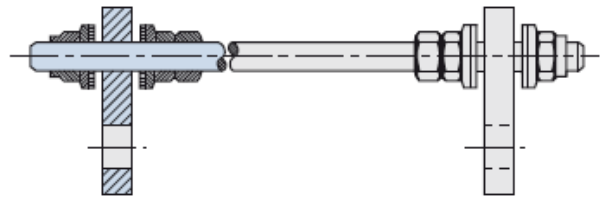

Nº TIE RODS RECOMMENDED

DN	BAR			
	5	7	10	15
40	-	-	-	•
50	-	-	-	•
65	-	-	-	•
80	-	-	-	•
100	-	-	•	•
125	-	-	•	•
150	-	-	•	•
200	-	-	•	•
250	-	•	-	-
300	-	•	-	-
350	-	•	-	-
400	•	-	-	-
450	•	-	-	-
500	•	-	-	-
600	•	-	-	-

TIE RODS NECESSARY FOR CORRECT ASSEMBLY

ND	PN10	PN16
40		2
50		2
65		2
80		2
100		2
125		2
150		2
200	2	2
250	2	2
300	4	4
350	4	4
400	4	4
450	4	4
500	4	4
600	4	4

